

**Original scientific paper**

*Received:08.08.2020*

*Accepted:10.09.2021*

**UDK: 674.05 630\*36/\*37**

**A THEORETICAL ANALYSIS OF FORESTRY AND WOOD  
PROCESSING MACHINES WITH SCREW DEVICES**

**Konstantin Marinov**

*University of Forestry, Sofia, Bulgaria,*

*Faculty of Forestry,*

*e-mail: kmarinov@ltu.bg*

**ABSTRACT**

Forestry and wood processing machines with screw conveyors and screw presses for wood chips and forest seeds have wide application in forestry and wood-processing industry. Utilization of the screw devices is due to some advantages they ensure at executing the technological processes, such as unceasing of the process, high productivity, low levels of noise, dustless work, etc. The design of the screws is in accordance with determination of their main kinematic and dynamic parameters. A great number of the elaborated constructions was realized based on practical experience. The relatively complicated transportation of products into the screw mechanisms makes it difficult to express the process by mathematical means. This fact defines the problems with deducing of analytical relationships for determination the main parameters of these mechanisms. In the present work some basic cinematics and structural parameters of the screw devices for processing and transportation forest seeds and wood chips are deduced and proposed.

**Keywords:** kinematics, wood chips, forest seeds, screw, pressure, speed, productivity.

**1. INTRODUCTION**

Screw mechanisms have wide application in construction of different machines and devices used for transporting and technological operations. There is a huge variety of these machines in relation to their function, such as conveyor-screws, mixing and pressing machines, feeding devices, dewatering apparatuses, etc. This fact presupposes some differences in construction of screw mechanisms, but they all have one common principle scheme including leading screw, cylinder, inlet and outlet devices.

In forest and wood-processing industry screw mechanisms are used in machines and equipment for transporting mineral and organic loose materials, technological chips, sawdust, etc. They are also utilized in some machines for technological processing of wood chips and materials, forest reproductive materials, etc. The main advantage of screw mechanisms is their comparatively simple construction and low prime cost, high productivity and reliability, low levels of noise and dustless work. (Sokolov 2004).

In fact, during logging and wood-processing, significant quantity of waste wood that can be used as source of energy, is discarded. The use of wood or other waste product of plant origin for production of briquettes is part of the world's ecological policy for better utilization of biomass as renewable energy source (Vitchev 2016, Vitchev et al. 2018). In the installations for briquettes manufacturing pistons and screws presses are used for the process of wood chips pressing. The main advantage of screws presses is unceasing process, higher productivity and quality of the final product at comparatively low operational exploitation costs (Marinov 2005, Silin 1973).

Presently, there is a number of companies producing and trading with machines for transportation and compression of wood chips. The technical parameters of screw mechanisms built into these machines directly influence their technical and exploitation characteristics. In the present

work analytical relationships for determination some basic parameters of screw mechanisms used in the machines are deduced and proposed.

## 2. THEORETICAL ANALYSES OF KINEMATICS AND DYNAMICAL PARAMETERS OF THE SCREW DEVICES

Main geometric parameters of the screw are its outer diameter ( $D$ ) and pitch ( $S$ ). The outer diameter is considered as starting parameter at performing the calculations. When the diameter is not preliminary defined, it can be tentatively determined according to the desired productivity  $W$  of the machine, by the empirical dependence (Kraus and Szumanski, 2006).

$$D = 2,5 \sqrt[3]{W/0,68} \quad (1)$$

The screw pitch influences significantly productivity of the process. In the zone of filling site the pitch depends mainly on the coefficient of friction of the material against the screw's surface and cylinder's sides. For transportation of loose materials the pitch is recommended to be within the ranges of  $S = (1,8 \div 2,2)D$  and for screw presses  $S = (0,8 \div 1,2)D$ .

The description of loose materials transportation process by means of analytical dependences is relatively complicated due to the sophisticated character of the process itself (Gruzdeev, Mirzoev and Yankov 1978, Sokolov et al., 2004, Zhong and O'Callahan 1992). This investigation uses preliminary elaborated physical model for description of the movement of material particles along the helical line in the conditions of outlet caused resistance. At figure 1 some basic parameters of the screw and the forces operating on the separate particle are presented.

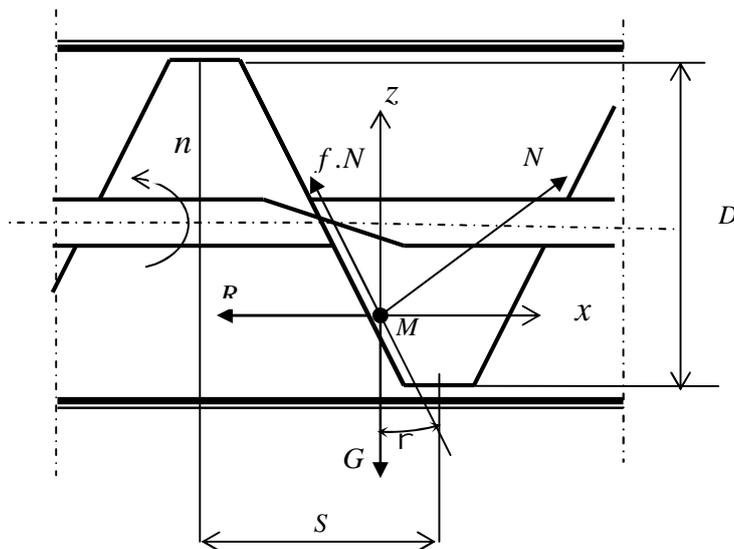


Figure 1. Scheme of main parameters of the screw and forces operating on particles

The speed of screw's revolution -  $n$  is one of main technological parameters influencing productivity of the process. By increasing the speed revolution bigger productivity is achieved. This acceleration reaches its maximum at so called "critical revolutions", when the particles of the product slow down and stop their movement in axial direction. This causes decrease in process productivity up to its physical ceasing. Based on theoretical calculations (Marinov, 2006) for determination of the critical speed revolution  $n_{KR}$ , the following analytical dependence is proposed:

$$n_{KR} = \frac{30}{\sqrt{r}} \sqrt{1 + \frac{1 + R/G \operatorname{tg}(\gamma + \zeta)}{\sim}}, \text{ min}^{-1}, \quad (2)$$

where  $G$  is the force of gravity,  $N$ ;

$R$  – resistance force of pressure,  $N$ ;

– helical line angle;

$r$  – outer screw's radius ( $r = 0.5D$ ),  $m$ ;

– friction angle of the particle against the screw's surface;

$\mu$  – coefficient of friction of the particle against the cylinder's surface.

Critical revolutions decrease with the increase of screw's diameter and of the coefficient of friction. At determining critical revolutions, in contrast to popular dependences described in technical literature, the force of  $R$  is introduced in the above formula (2). Increase of the resistance force in this case has positive effect and leads to acceleration of the critical values. By this force the normal pressure caused by mounting additional loading devices at the outlet or so called "prop effect" of the outlet is taken into consideration. The prop effect on the mechanisms is characteristic especially for screw presses. It is due to the increasing pressure on the particles as a result of the material's compression in the process of screw's movement. In this case  $R$ - force is determined by the normal pressure  $p_n$  of the press and is calculated by the formula:

$$R = f \cdot p_n (D^2 - d^2) / 4, \quad (3)$$

where  $d$  is the outer diameter of the screw.

For determination of the critical screw's radius at given speed of revolution  $n$ , after performing the necessary replacements and calculations, the following equation is proposed:


$$r_{KR} = \frac{900A - C \cdot n^2 + \sqrt{(C \cdot n^2 - 900A)^2 + 3600 \cdot B \cdot n^2}}{2 \cdot n^2}, \quad (4)$$

where  $A$ ,  $B$  and  $C$  are the functional parameters of the equation and are defined with the following dependences:

$$A = f \frac{R}{G} + \mu + 1, \quad B = \frac{H}{2f} \left( \frac{R}{G} - f + \mu \cdot f \right), \quad C = \mu \cdot f \frac{H}{2f}.$$

### 3. THEORETICAL PRODUCTIVITY OF FOREST AND WOOD PROCESSING MACHINES WITH SCREW DEVICES

Productivity of screw machines is determined by the geometric dimensions of screw and axial speed of particles movement. This speed is function of the revolution speed, the angle parameter of movement and the coefficient of friction. The main speed  $v$  can be expressed with the plan of speed vectors (Figure 2). It is shifted towards the circle speed  $v$  under a certain angle  $\alpha$ . This angle is function of the revolution speed, the radius at which the separate particle is positioned, the turning axis and the resistance  $R$  - force.

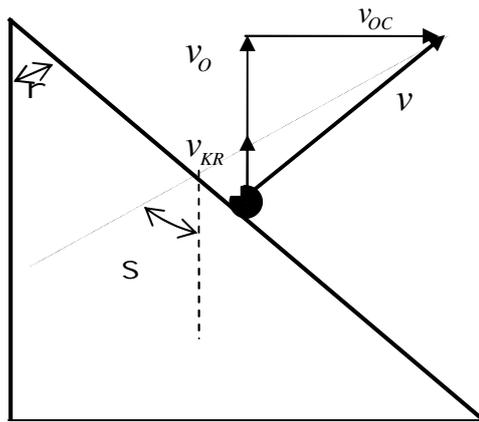

**Figure 2** Scheme of speed vectors  
lan

- $v$  – absolute speed;
- $v$  – circle speed;
- $v_{kr}$  – critical speed;
- $v$  – axial speed;
- angular parameter of movement

Axial speed can be presented as projection of the geometrical sum of  $v_o$  and  $v_{KR}$ , as  $v_{oc} = (v_o - v_{KR}) \cdot \text{tg} \xi$ . For determination of the angular parameter of movement  $\xi$ , after performing the necessary calculations, the following functional dependence is drawn:

$$\text{tg} \xi = \frac{\sqrt{\frac{r}{g} - 1 + \frac{R/G \cdot \sin(r + \xi) + \cos(r + \xi)}{\sim \cdot \cos(r + s + \xi)}}}{\sqrt{1 + \frac{R/G \cdot \sin(r + \xi) - \cos(r + \xi)}{\sim \cdot \cos(r + s + \xi)}} - \sqrt{1 + \frac{1 + R/G \cdot \text{tg}(r + \xi)}{\sim}}} \text{tg} \gamma \quad (5)$$

The solution of equation (5) is done by the method of consecutive approximations. In order this equation to give decision and the parameter to be real, the angle  $\xi$  should be defined in the limits of  $0 < \xi < 90^\circ - (r + s)$ .

From the deduced dependence (5) for determination of the angular parameter  $\xi$  the following conclusions can be made:

- parameter  $\xi$  increases with acceleration of the screw's angular speed
- parameter  $\xi$  decreases with increase of the resistance force  $R$ .

The average axial speed of a stream of material particles can be determined through the established dependence (Marinov, 2005) from the following equation:

$$v_{cp} = \frac{\int_0^{2\pi} \int_{r_1}^{r_2} v_{oc} \cdot r \, dr \cdot d_n}{\int_0^{2\pi} \int_{r_1}^{r_2} r \, dr \cdot d_n},$$

- where  $r$  is the radius, at which the particle is positioned towards the turning axis,  $m$ ;
- $r_1$  and  $r_2$  are respectively the inner and the outer radiuses of the screw,  $m$ ;
- $\gamma$  is the angle of screw's turning, varying from  $0$  to  $2\pi$  ;
- $v$  is the speed of particle in direction of screw's axis,  $m/s$ .

After performing the necessary mathematical transformations, for determination of the average speed  $v_{av}$  the following equation is drawn:

$$v_{av} = \frac{\int_0^{2f} \int_{r_1}^{r_2} \left[ S \cdot r - \sqrt{\frac{g \cdot r}{\sim} \cdot \frac{R/G \cdot \sin(r + \{ ) + \cos(r + \{ )}{\cos(r + s + \{ )}} \right] tga \cdot rdr \cdot d_n}{\int_0^{2f} \int_{r_1}^{r_2} rdr \cdot d_n}} \quad (6)$$

Due to a certain extent of complexity of the obtained equation (6) special program for its calculation is required. To determine the average axial speed of movement  $v_{av}$  with practically appropriate accuracy, the following simplified dependence is suggested:

$$v_{av} = \frac{S}{2f} \left[ \frac{f \cdot n}{30} - \sqrt{\frac{g}{\sim \cdot r_{av}} \cdot \frac{R/G \cdot \sin(r_{av} + \{ ) + \cos(r_{av} + \{ )}{\cos(r_{av} + s_{av} - \{ )}} \right], m/s, \quad (7)$$

where  $r_{av} = 0.5(D+d)$  is the average conventional radius of screw,  $m$ ;

$r_{av} = \arctg \frac{S}{2f \cdot r_{av}}$  is average angle of screw's helical line;

$s_{av}$  is angular parameter of movement, determined by the average angle of the helical line  $a_{av}$ ;  
 $n$  is rotation speed of the screw,  $s^{-1}$ .

The average axial speed at wood chips stream movement along the helical area is used for determination of productivity. To calculate productivity of one-thread screw machines working with wood chips, the following analytical dependence is proposed:

$$W_h = 3600f \left( \frac{D^2 - d^2}{4} \right) \cdot S \dots \left[ n - \frac{1}{2f} \sqrt{\frac{g}{\sim \cdot r_{av}} \cdot \frac{R/G \cdot \sin(r_{av} + \{ ) + \cos(r_{av} + \{ )}{\cos(r_{av} + s_{av} + \{ )}} \right], kg/h \quad (8)$$

where  $\rho$  is the wood chips or forest seed density,  $kg/m^3$ ;

The work speed revolutions of the screws vary in the boundaries of  $n_N = (0,3 \div 0,8)n_{KR}$ . The lower values are applied for screws with smaller diameter and the higher ones – for screws with bigger diameter.

In contrast to the existing dependences for determination of productivity of screw machines for transporting of wood particles, in the formula proposed here (7), the influence of prop effect at the side of outlet is also reflected. By increasing the value of this influence, the normal pressure increases, and consequently the  $R$ -force increases too. This leads to drop in productivity.

#### 4. CONCLUSIONS

Theoretical dependences for determination of some basic parameters at wood particles movement along the helical area of screw mechanisms are proposed. These relationships are used in determination of the dynamic and exploitation indexes of transportation and briquetting machines.

On basis of performed theoretical investigation on screw mechanisms used for transportation and processing of wood particles, analytical dependences are deduced and proposed for determination of:

- axial speed of wood particles movement;
- angular parameters of movement;
- average transport speed of wood and forest seed particles stream;
- productivity of screw conveyor and presses for densifying wood and forest seeds.

The obtained results can be applied to other similar machines that use screw mechanisms and work in conditions of axial pressure for transportation of disperse materials as conveyor-screw, mixing and press machines, etc.

## REFERENCES

- [1] Gruzdeev, I., Mirzoev, R., Yankov, V. (1978): *Teoria shnekovich ustrojstv*. Leningrad (in Russian).
- [2] Marinov, K. (2005): Theoretical Exploration on The Process of Movement of Seeds of Dewingers with Continual Action. - *Forestry Ideas*, 2: 84-94.
- [3] Marinov, K. (2006): Critical parameters determination at the mechanisms of unceasing dewinging machines. *Woodworking and furniture manufacturing*, 2: 2-6.
- [4] Silin, V. (1973): *Dinamika processov prerabotki plasmass v chervjachnih machin*. Moskva, *Machinostroene*, 270 p. (in Russian).
- [5] Sokolov, M., Klinkov, ., Efremov, . (2004): *Avtomatizirovannoe proektirovanie I raschet shnekovich machin*. Moskva, *Machinostroene*, 248 p. (in Russian).
- [6] Kraus, A., Szumanski, W. (2006). Briquetting of lignocellulose waste in perpetual screw briquetting machine. *Electronic journal of Polish Agricultural Universities*, 9: 1-6.
- [7] Vitchev P. (2016), Determination of the noise load level generated by a woodworking milling machine with lower work shaft position, *Journal of Management and Sustainable Development*, Sofia, 54(5): 5-12, ISSN 1311-4506. (in Bulgarian).
- [8] Vitchev P., Zh. Gochev (2018), Study of milling surfaces depending on the parameters of technological process, 29th International Conference on Wood Science and Technology – ICWST: proceedings of papers, Faculty of Forestry, University of Zagreb, Croatia, pp. 193-199, ISBN: 978-953-292-059-8.
- [9] Zhong, Z., O’Callahan, J. (1992). A theoretical analysis of the extrusion pressure in a tapered screw conveyor. *Journal of Agricultural Engineering Research*, Vol 52: 249-271.